


Accessories for heating controller Elfatherm E8

Product brochure · GB
10.1.4 Edition 02.05

CE

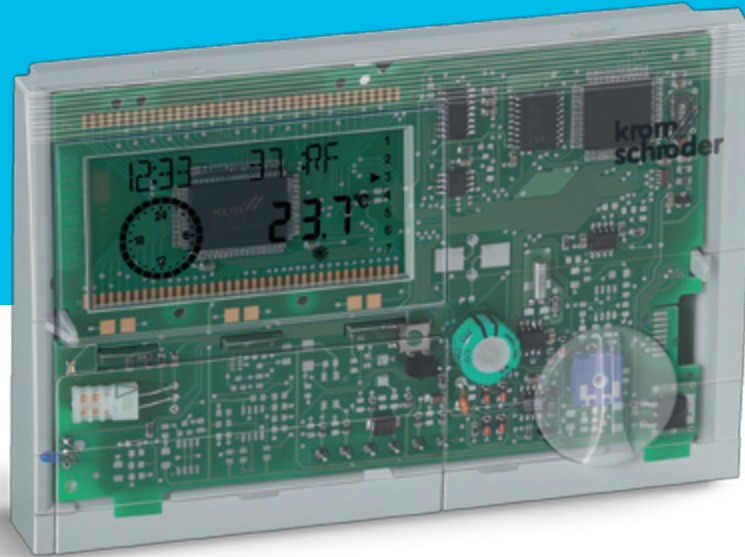

**krom
schroder**

- Expansion of the functions of heating controller E8





Operation-control module BM 8

For easy control and display on a heating system. To set the desired room temperature, with a freely adjustable week program (three different heating times, changing daily, one individual setpoint temperature value for each heating time), heating time prolongation and interruption can be selected direct, with integral temperature sensor to measure the room temperature.



Boiler control panel

For the basic control equipment of the heating control system, such as safety temperature limiter, temperature controller, boiler temperature display and mains switch. Designed for the installation of a main controller and a secondary controller.



Remote control FBR2 (6 operating modes)

For setting the desired room temperature, with a rotary dial for adjusting the operating mode and a temperature sensor to measure the room temperature.



Outdoor sensor AF

Surface mounting, enclosure IP 21, safety class II safety extra-low voltage, measurement range -39 to 60 °C, including wall plug and fastening screw.



Wall casing

For the simple wall surface mounting of the heating controller E8. Large, fully wired connection chamber, clear connections.

Boiler sensor KF

For installation in a dry submersible tube, in a protective tube with a diameter of 6 mm and a length of 50 mm, with connection cable 2 x 0.5 mm², length 2 m, measurement range: 0 to 105 °C.



Flow sensor VF

To register the temperature on mixer circuits, installed direct on the feed pipe, including heat conducting paste and fastening tape, with connection cable 2 x 0.5 mm², length 3 m, measurement range: 0 to 105 °C.



Storage tank sensor SPF

To record the hot water storage tank temperature, with contact pressure spring for installation in dry submersible tubes even with larger diameters, in a protective tube with a diameter of 6 mm and a length of 50 mm, with connection cable 2 x 0.5 mm², length 3 m, measurement range: 0 to 105 °C.



Radio clock

DCF receiver for automatic timer adjustment for the heating system.



ComfortSoft

PC software for parameterisation of the controller and to monitor the heating system, can be run under Windows 95®, including adapter cable.



Detailed information on this product

www.docuthek.com

Contact

www.kromschroeder.com → Sales

Elster GmbH
Geschäftssegment Comfort Controls
Kuhbrückenstraße 2 – 4
31785 Hameln
Deutschland
T +49 5151 9572-0
F +49 5151 9572-100
vertrieb.cc@kromschroeder.com
www.comfort-controls.de

Kromschroeder, a product brand of the Elster Group



We reserve the right to make technical modifications in the interests of progress.

Copyright © 2007 Elster Group
All rights reserved.